


FROM DSP DIGITAL CONNECTOR IDC 50 - P

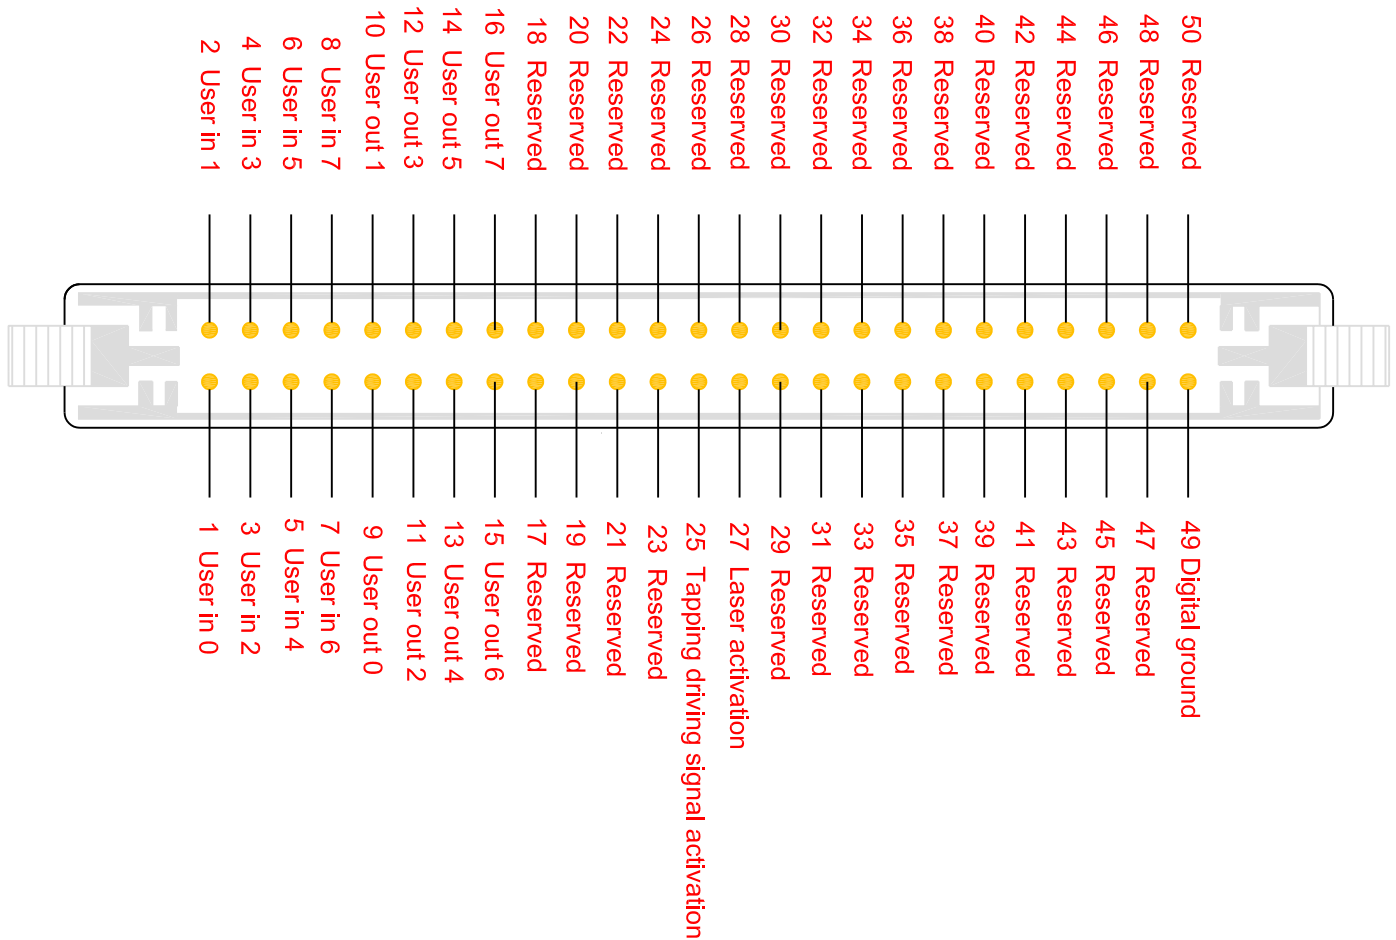

Note:

Digital outputs are used for triggering signals such us:
Fast scan forward / backward,
slow scan forward / backward
data acquisition trigger ...
and are configurable by WSxM software.

This documentation can be changed without previous notification