


FROM DSP DIGITAL CONNECTOR IDC 50 - P

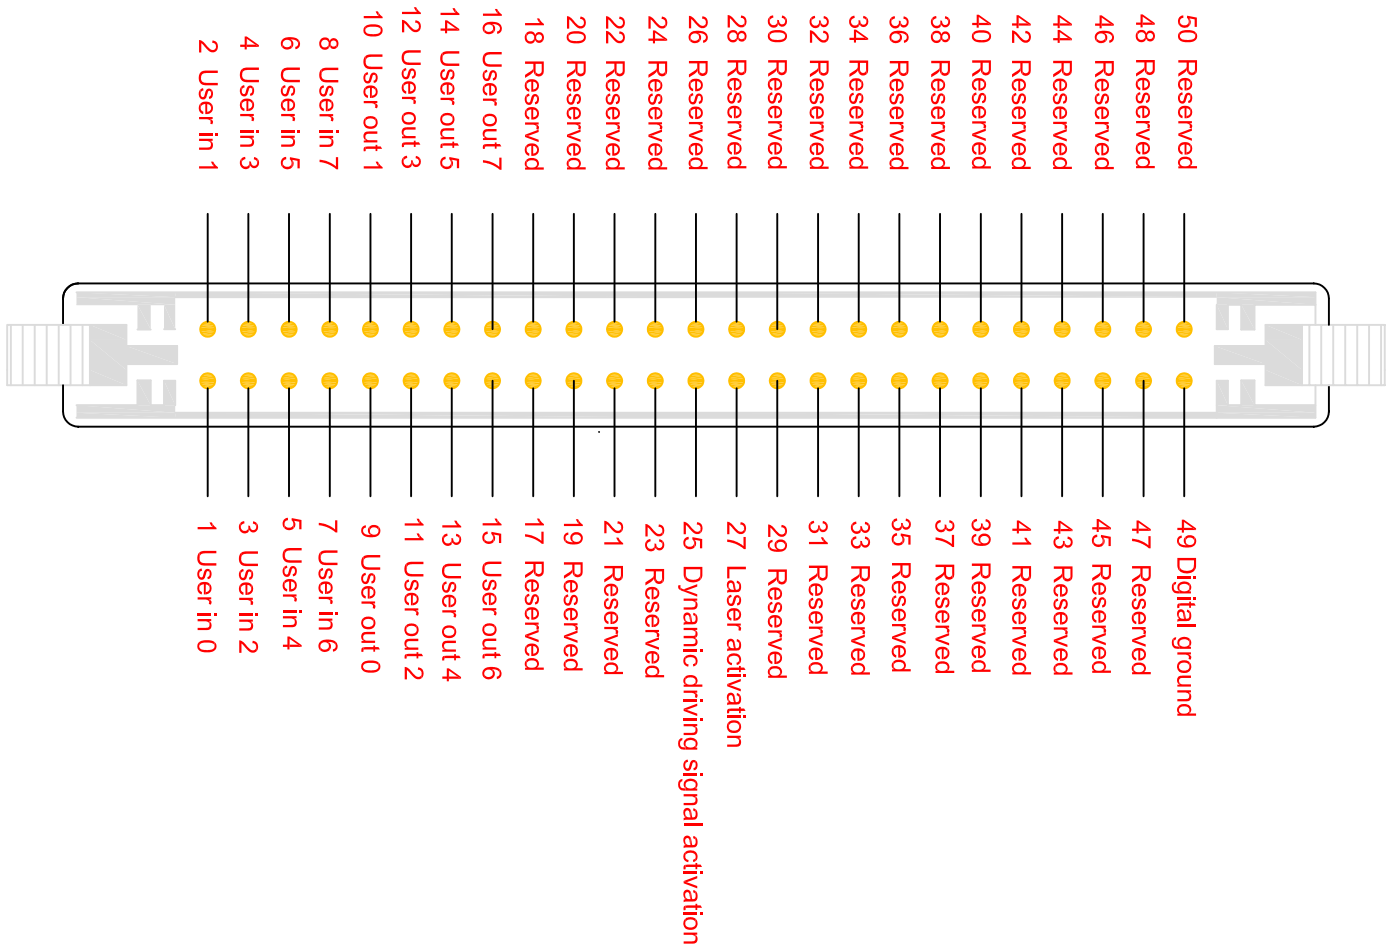

Note:

Digital outputs are used for triggering signals such us:
 Fast scan forward / backward,
 Slow scan forward / backward,
 Data acquisition trigger ...
 all of which are configurable by WSxM software.

This documentation can be changed without previous notification